


All in One type Interface!

Acquisition	Sampling rate Max. 500 KHz (sweep mode only) Analog input 4Ch, Digital I/O 1Ch
Analysis	Calculating formulas to drawing graphs by touching the icon.
Result & Report	Students can write a report which is made for a subject of experiment.
High Performance	10.5" Big screen 2.0 GHz Octa-core

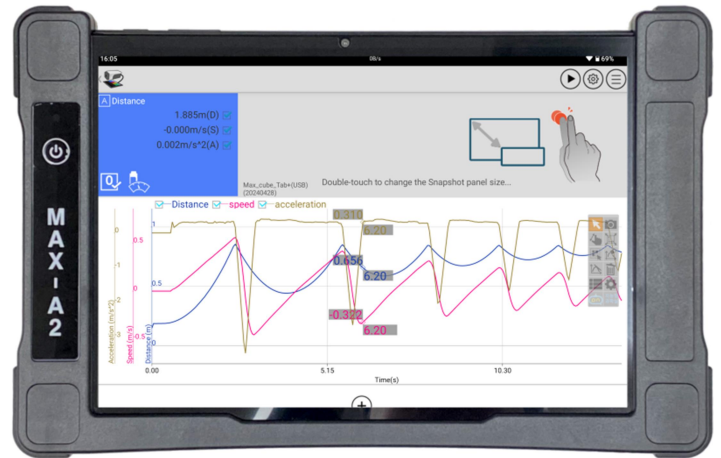

■ Features & Benefits

- MBL interface and smart device consist of one, so you can make an experiment more easily and quickly.
- Science#™ logging program is built-in(pre-install), it enables experimentation, analysis and report by using various built-in contents.
- Enables more efficient laboratory operation by utilizing experiment and report sharing through the network.




- You can make an experiment by connecting various sensors of ScienceCube® using 4 channels of sensor ports and 1 channel of digital in/out ports.
- It is a perfect ICT device for educational environments, because it supports network enabling teacher to monitor student.




Logging Application

- Analysis base on Contents.

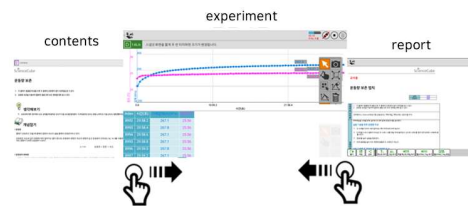

- A variety contents for Physics, Chemistry, Biology and Earth Science.
- Experiment environment Auto-configuration.

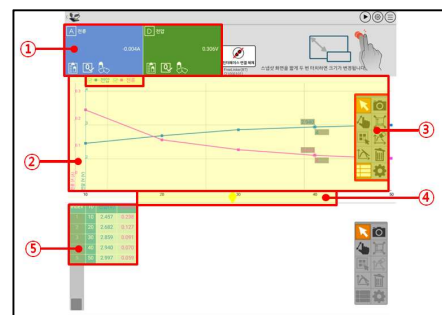

It is possible to connect all ScienceCube® interface and data logger.



■ Technical data

Performance

Display	
Size	10.5" + 10 point Capacitive Touch
Resolution	1920 * 1280 FHD
Processor	
Main-Application	2.0 GHz Octa Core CPU
Sub-Acquisition	120MHz, 32bit MCU
Storage	
RAM	4GB
Flash Memory	64GB
Expandable(Optional)	MicroSD (factory built-in)
Operating System	Android 12
Video Camera	5M Pixel(Rear) 2M Pixel(Front)
Connectivity	Wi-Fi 802.11b/g/n/ac@2.4G+5GHz Bluetooth 5.0
Audio	Internal Speaker * 2 Internal Microphone * 1 Audio Output * 1 MIC. input * 1
Additional Function	FM Radio GPS

Datalogging

Measurement	
Real time	1,000 Samples/s.
Sweep mode	Max. 500,000 Samples/s
AD Resolution	12bit
Sensor Ports	
Analog & Digital	4 channels
Digital I/O & Sensor	1 channel
Built-in Sensors	3-axis Accelerometer 3-axis Gyroscope Sound

General

Power Requirements	
USB Type-C	DC 5V, 2.0A
Rechargeable Battery	
Main System	Li-Polymer 5,300mAh
Sub System	2,000mAh or 4,000mAh (*Optional)
Environment	
Operating	0 .. 40°C
Storage	-40 .. 60°C
Warranty	3 years


Mechanics

Dimensions	294 x 193 x 50mm (W x L x H)
Weight	810g (29 oz)
Housing Materials	ABS + Rubber

Packaging & Accessories

Packaging Dimensions	380 x 285 x 85mm (W x L x H)
Packaging Weight	1.6 Kg (3.5 lb)
Packaging Materials	
Carton	Paper
Internal cushioning	PE-Foam
Include Cables	
Sensors	1394-6P plug (1.5m) * 4
USB Charging	USB Type A/C (0.8m) * 1
Charging USB Adaptor	* Optional (Varies by country)
Input	AC220V, 50/60Hz
Output	DC5V, 2.0A (USB type A)

■ Functions

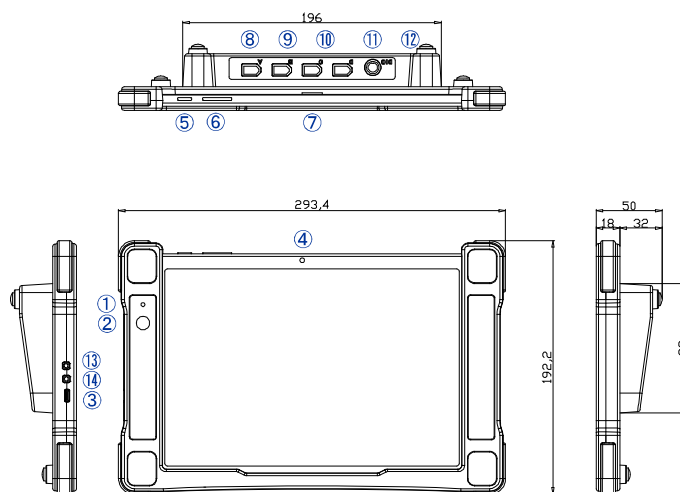

- ① INTERFACE STATUS LED
- ② INTERFACE POWER ON/OFF
- ③ POWER INPUT/CHARGE(USB-Type C)
- ④ FRONT CAMERA
- ⑤ MAIN POWER ON/OFF
- ⑥ SOUND VOLUME UP/DOWN
- ⑦ REAR CAMERA
- ⑧ ANALOG/DIGITAL SENSORS PORT [A]
- ⑨ ANALOG/DIGITAL SENSORS PORT [B]
- ⑩ ANALOG/DIGITAL SENSORS PORT [C]
- ⑪ ANALOG/DIGITAL SENSORS PORT [D]
- ⑫ DIGITAL I/O & SENSOR PORT
- ⑬ AUDIO OUTPUT
- ⑭ MIC. INPUT

■ Notices

- This product is to be used for science educational purposes only.
- It is not appropriate for any industrial, medical, or commercial applications.